

G1.5J

SINTERED GLASS JUNCTION AVALANCHE RECTIFIER

VOLTAGE: 600V

CURRENT: 1.5A




FEATURE

Glass passivated
Hermetically sealed package
Low reverse current

MECHANICAL DATA

Case: SOD-57 sintered glass case
Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
Polarity: color band denotes cathode end
Mounting position: any

SOD-57

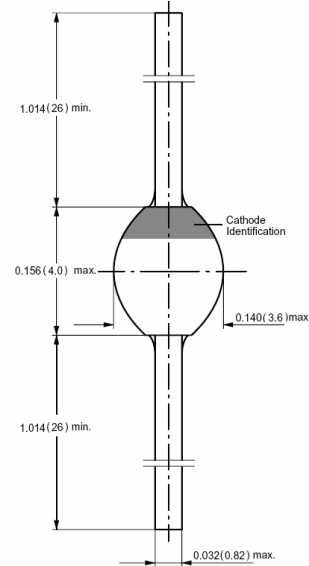

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	G1.5J	units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	600	V
Maximum RMS Voltage	V_{RMS}	420	V
Maximum DC blocking Voltage	V_{DC}	600	V
Maximum Average Forward Rectified Current 3/8"lead length at $T_a=55^\circ\text{C}$	I_{FAV}	1.5	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	50	A
Maximum Forward Voltage at rated Forward Current and 25°C	V_F	1.1	V
Maximum DC Reverse Current at $V_{DC} = 600\text{V}$ and 25°C	I_R	5.0	μA
Maximum DC Reverse Current at $V_{DC} = 650\text{V}$ and 25°C	I_R	5.0	μA
Maximum DC Reverse Current at $V_{DC} = 700\text{V}$ and 25°C	I_R	25.0	μA
Maximum DC Reverse Current at $V_{DC} = 600\text{V}$ and 150°C	I_R	200	μA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	2.0	μS
Typical Junction Capacitance (Note 2)	C_j	25.0	pF
Typical Thermal Resistance (Note 3)	$R_{th}(ja)$	45.0	$^\circ\text{C}/\text{W}$
Storage and Operating Junction Temperature	T_{stg}, T_j	-65 to +175	$^\circ\text{C}$

Note:

- Reverse Recovery Condition $I_f = 0.5\text{A}$, $I_r = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$
- Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
- Thermal Resistance from Junction to Ambient at 3/8"lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES G1.5J

FIG. 1 - FORWARD CURRENT DERATING CURVE

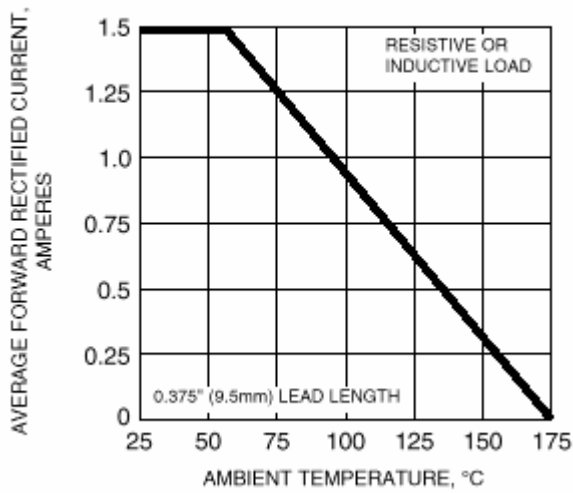


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

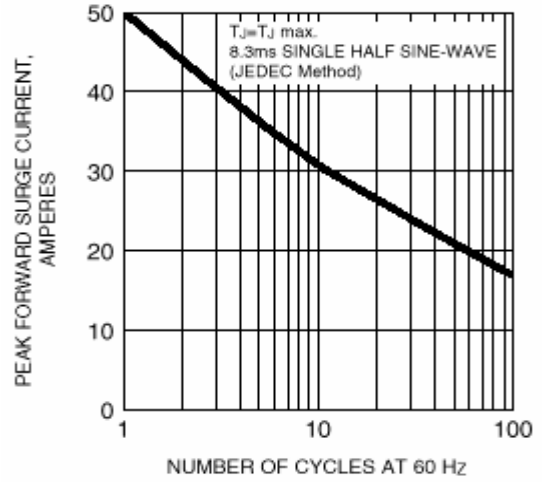


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

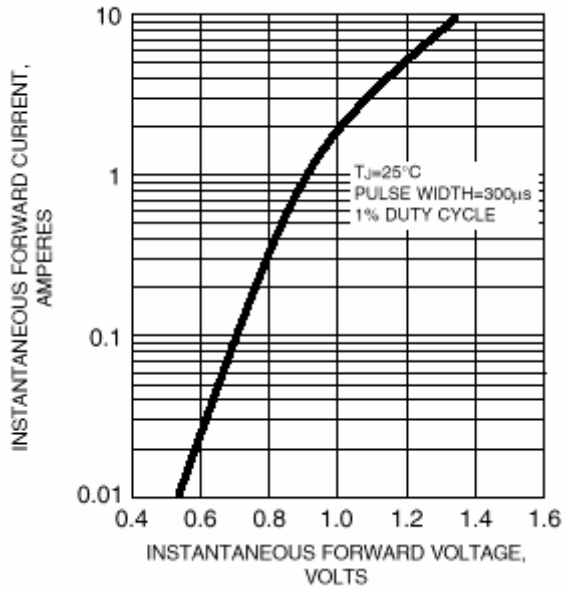


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

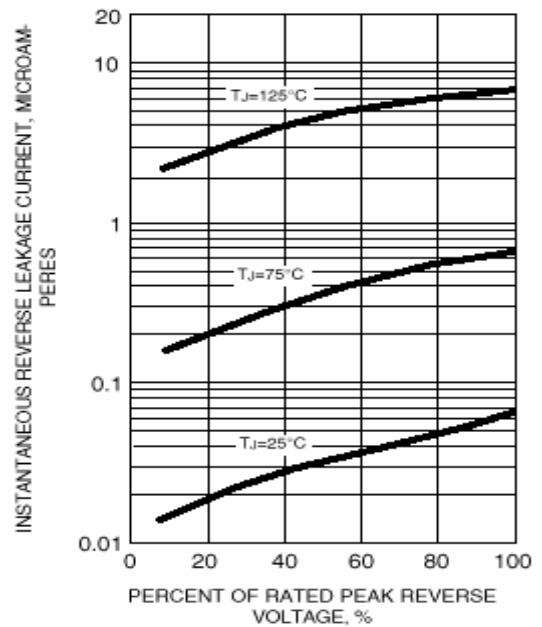


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

